



SID (RADAR) ALL RWYS
EAST SALE (YMES)

ATIS 125.4 350	AWIS (AH) 125.4	ACD 133.6 134.1	SMC 127.25	TWR 118.3 257.8	APP 123.3 340.2	ACC 135.8	CTAF/AFRU 118.3	FIA (ML) 124.0	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
-------------------	--------------------	-----------------------	---------------	--------------------	-----------------------	--------------	--------------------	-------------------	--

TLV FL110	TA 10000
-----------	----------

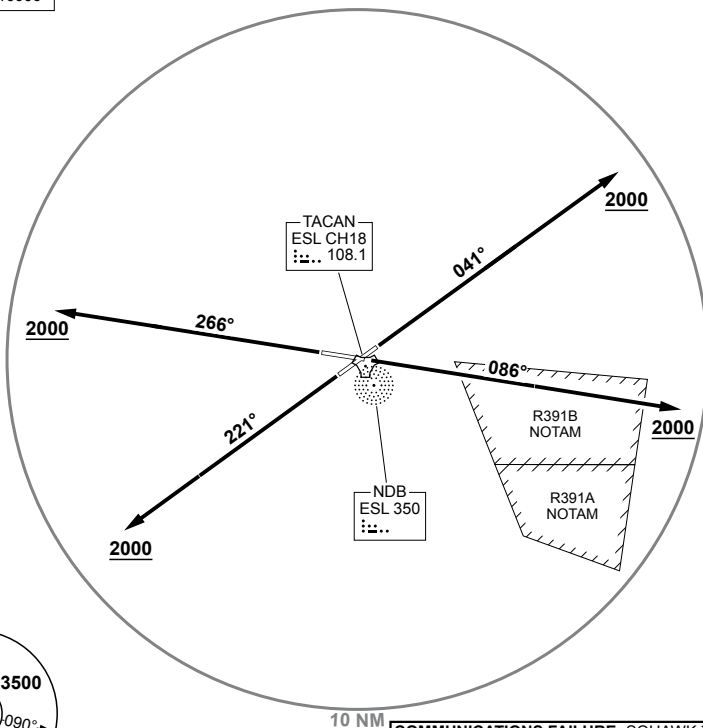

MSA - ESL TACAN

COMMUNICATIONS FAILURE: SQUAWK 7600, MAINTAIN LAST ASSIGNED VECTOR FOR TWO MINUTES; AND CLIMB IF NECESSARY TO MINIMUM SAFE ALTITUDE TO MAINTAIN TERRAIN CLEARANCE; THEN PROCEED IN ACCORDANCE WITH THE LATEST ATC ROUTE CLEARANCE ACKNOWLEDGED

EAST SALE FIVE

RWY 04

GRAD 3.3%. TRACK 041°. AT OR ABV 2000FT. BUT NOT BEFORE DER. TURN TO ASSIGNED HDG OR TRACK

RWY 09

GRAD 3.3%. TRACK 086°. AT OR ABV 2000FT. BUT NOT BEFORE DER. TURN TO ASSIGNED HDG OR TRACK

RWY 22

GRAD 3.6% UNTIL 1200FT, THEN 3.3%, TRACK 221°, AT OR ABV 2000FT, BUT NOT BEFORE DER, TURN TO ASSIGNED HDG OR TRACK

RWY 27

GRAD 3.3%. TRACK 266°. AT OR ABV 2000FT. BUT NOT BEFORE DER. TURN TO ASSIGNED HDG OR TRACK

CHANGES: EDITORIAL

S38 05.94 E147 08.97

05 NOV 20

**AIS-AF
MILITARY USE ONLY**

EAST SALE (YMES)
SID (RADAR) ALL RWYS