

PANS-OPS, WGS-84

TACAN RWY 12
WILLIAMTOWN (YWLM)


1. SHUTL MAY NOT BE AVBL
WHEN R596 ACTIVE.



MISSED APPROACH:


TRACK DCT TO TACAN THEN R-122. CLIMB TO **3100FT** OR AS DIRECTED BY ATC.

ATIS 134.45 316.1 365	ACD 130.35	SMC 121.8	TWR 118.3 280.9	APP 135.7 293.4	FIA (BN) 125.7	CTAF /AFRU /PAL 118.3	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
--------------------------	---------------	--------------	--------------------	--------------------	-------------------	--------------------------	--

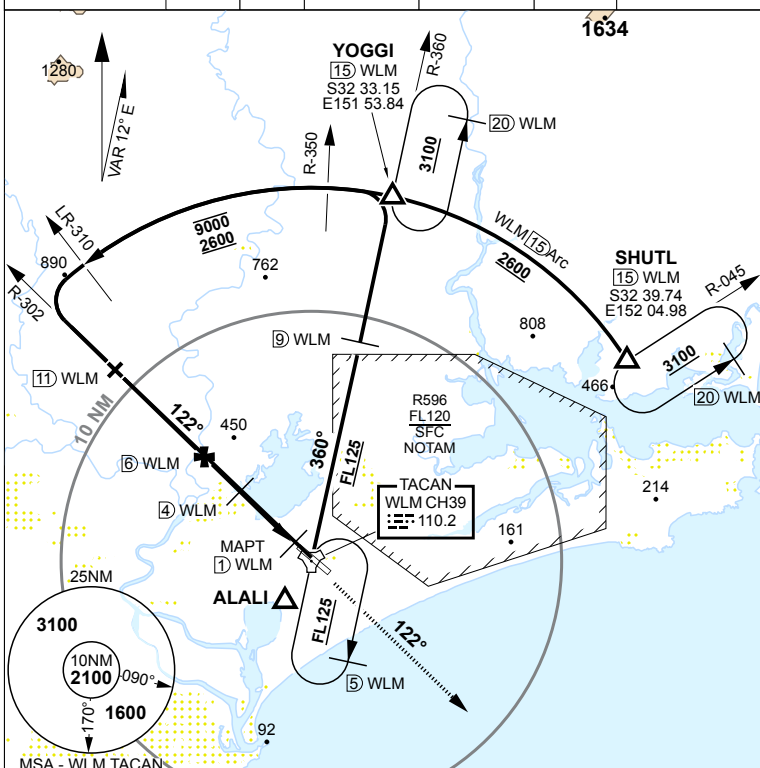


TRACK IN	TIME	MNM ALT	DME LIMIT
360°		FL125	5

HOLDING AT ALALI TAG.




TRACK IN	TIME	MNM ALT	DME LIMIT
225°		3100	20

SHUTTL HOLDING




TRACK IN	TIME	MNM ALT	DME LIMIT
180°		3100	20

YOGGI HOLDING




WLM TAC	10.3	10	9	8	7	6	5	4	3	2.6			
ALTITUDE	3100	3010	2690	2370	2050	1740	1420	1100	780	640			

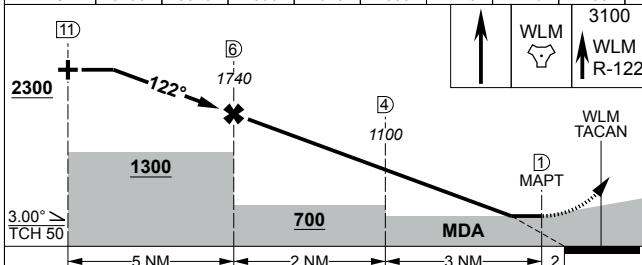

CATEGORY	A	B	C	D
S-12	640 609	2500m	(VIS -1900 WITH ACTUAL QNH)	
CIRCLING	690 659 2000m	710 679 2400m	810 779 4000m	1070 1039 5000m

TLV FL110	TA 10000
THR ELEV 29	TDZE 30



HIRL all Rwy's

CHANGES: TAC CH/FREQ

S32	47.70	E151	50.07
-----	-------	------	-------

08 SEP 22

**AIS-AF
MILITARY USE ONLY**

WILLIAMTOWN (YWLM)
TACAN RWY 12