


MILITARY USE ONLY

S14 31.26 E132 22.67
PANS-OPS, WGS 84


STEREO RWY 14
TINDAL (YPTN)

ATIS	ACD	SMC	TWR	APP	TFC	FIA(BN)	CTAF/AFRU	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
124.0 316.3 112.3	128.1 241.2	135.85 264.3	119.7 257.3	120.95 261.4	125.8 254.7	122.6	119.7	ELEV 443

315/15 FOR INDIA
045/15 FOR TANGO

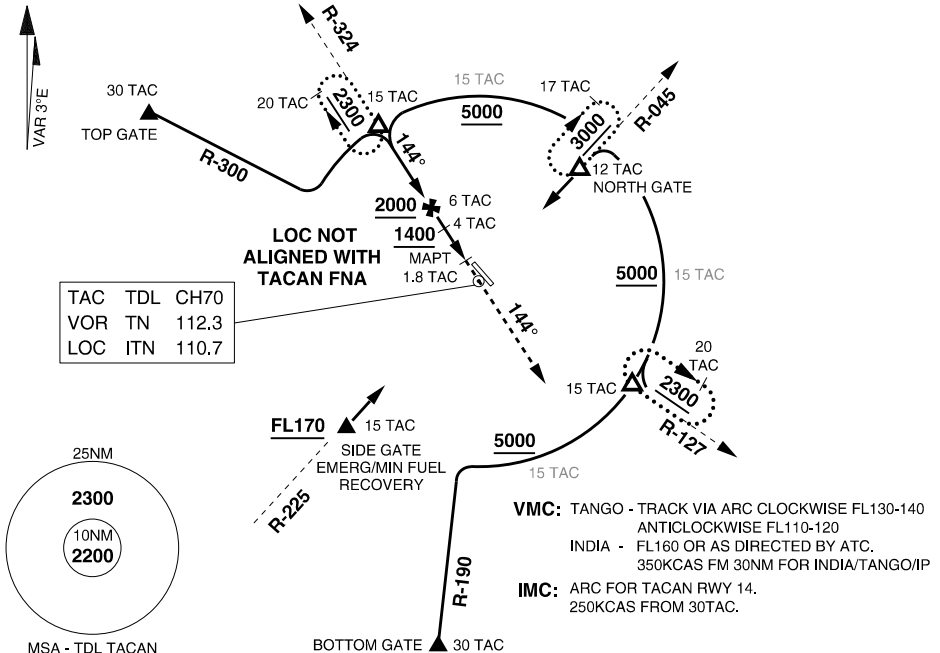

TDL TACAN DIST	6.2	6	5	4	3	2	1.9			
ALTITUDE (LOC)	2300	2230	1910	1590	1270	950	930			

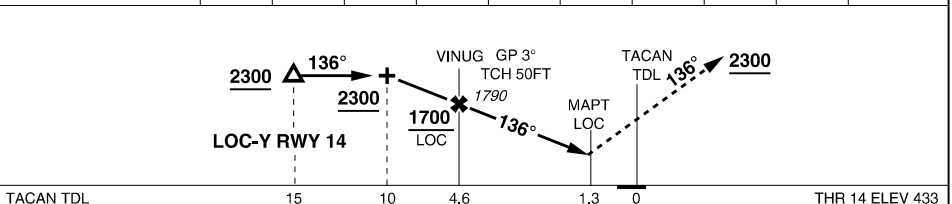

PROCEDURE	S-MINIMA	CIRCLING		MISSED APPROACH
		C	D	
LOC-Y RWY 14	930 497 -2800 (VIS -2200 WITH ACTUAL QNH)	1320 877 -4000	1350 907 -5000	TRACK 136°. CLIMB TO 2300FT
TACAN RWY 14	940 507 -2800 (VIS -2200 WITH ACTUAL QNH)	1320 877 -4000	1350 907 -5000	TRACK DIRECT TO TACAN THEN R-144. CLIMB TO 2300FT

NOTES: 1. ATC WILL OFFER TRACK SHORTENING WHEN AVAILABLE
2. AVOID GORGE (NOT BELOW A030 UNTIL/UNLESS WEST OF R-350)

CHANGES: REVISED LOC-Y/TAC RWY 14 PROCEDURES

15 JUN 23

ACG
MILITARY USE ONLY

TINDAL (YPTN)
STEREO RWY 14