


S19 15.16 E146 45.92  
PANS-OPS, WGS 84

SID (RADAR) RWY 01 (CAT H)

MILITARY USE ONLY

TOWNSVILLE INTL (YBTL)

ATIS	AWIS (AH)	ACD	SMC	TWR	APP/DEP	FIA (BN)	CTAF/AFRU	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
114.1 133.5 276	133.5	128.1 236.1	121.8 264.6	118.3 257.8	126.8 307.8	120.55	/PAL 118.3	

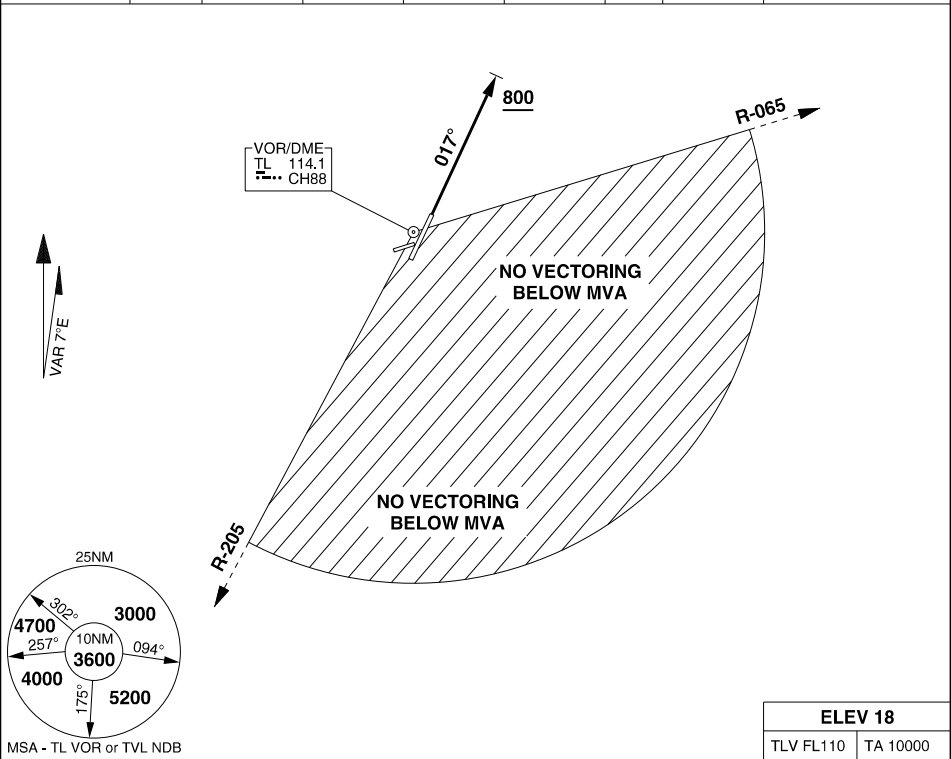

TOWNSVILLE COPTER FOUR DEPARTURE

RWY 01

- GRAD 6.0% UNTIL 800FT THEN 5.0%
- TRACK 017°
- AT 800FT, BUT NOT BEFORE DER,  
TURN TO ASSIGNED HDG OR TRACK

COMMUNICATIONS FAILURE PROCEDURE

ON RECOGNITION OF COMMUNICATIONS FAILURE:

- SQUAWK 7600
- MAINTAIN LAST ASSIGNED VECTOR FOR TWO MINUTES; AND
- CLIMB IF NECESSARY TO MINIMUM SAFE ALTITUDE TO MAINTAIN TERRAIN CLEARANCE; THEN
- PROCEED IN ACCORDANCE WITH THE LATEST ATC ROUTE CLEARANCE ACKNOWLEDGED

CHANGES: LOCATION NAME, DEP TEXT

21 MAY 20

MILITARY USE ONLY  
AIS-AF

TOWNSVILLE INTL (YBTL)  
SID (RADAR) RWY 01 (CAT H)