



STEREO RWY 14
TINDAL (YPTN)

ATIS	ACD	SMC	TWR	APP	TFC	FIA(BN)	CTAF/AFRU AFIS	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
124 0 316 3 112 3	128 1 241 2	135 85 264 3	119 7 257 3	120 95 261 4	125 8 254 7	122 6	119 7	

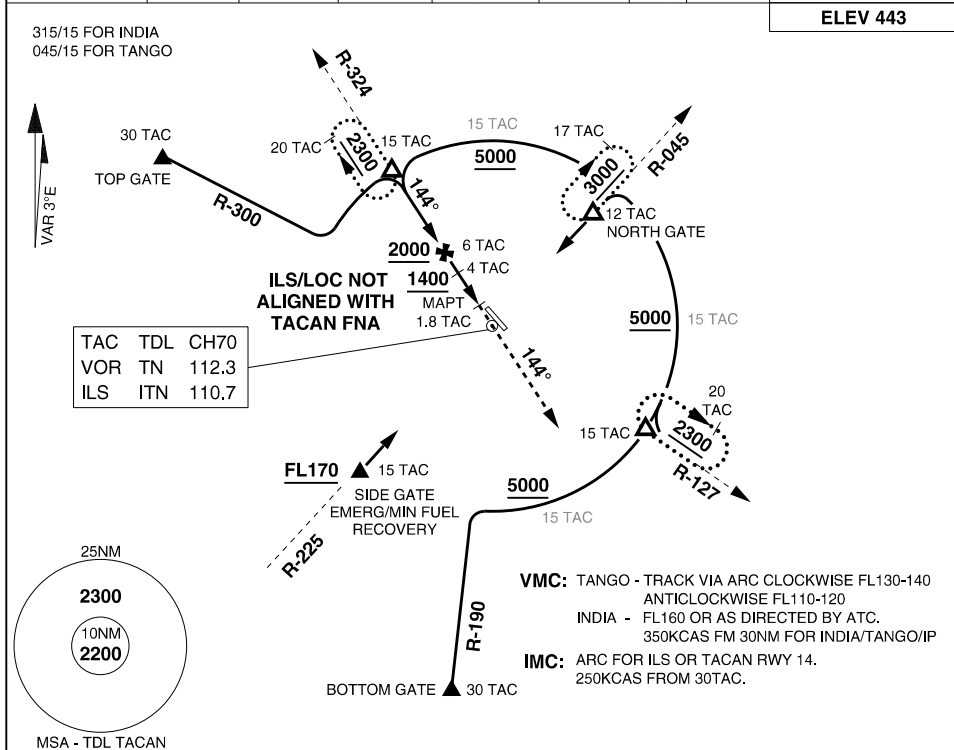

TDL TACAN DIST	6.7	6	5	4	3.3					
ITN DME DIST	5.9	5.2	4.2	3.2	2.4					
ALTITUDE (ILS/LOC)	2300	2070	1750	1430	1200					

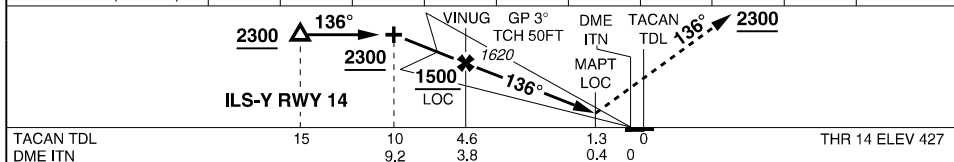

PROCEDURE	S-MINIMA	CIRCLING		MISSED APPROACH
		C	D	
ILS-Y RWY 14	990 563 -2200 (VIS -1700 WITH ACTUAL QNH)	1320 877 -4000	1350 907 -5000	TRACK 136°. CLIMB TO 2300FT
LOC-Y RWY 14	1200 773 -3500 (VIS -2900 WITH ACTUAL QNH)	1320 877 -4000	1350 907 -5000	TRACK 136°. CLIMB TO 2300FT
TACAN RWY 14	940 507 -2800 (VIS -2200 WITH ACTUAL QNH)	1320 877 -4000	1350 907 -5000	TRACK DIRECT TO TACAN THEN R-144. CLIMB TO 2300FT

CHANGES: ADD ILS, REVISED PROCEDURE

05 SEP 24

**ACG
MILITARY USE ONLY**

TINDAL (YPTN)
STEREO RWY 14