


S19 15.16 E146 45.92
PANS-OPS, WGS 84

MILITARY USE ONLY

ATC USE ONLY

RTCC
TOWNSVILLE INTL (YBTL)

ATIS	AWIS (AH)	ACD	SMC	TWR	APP/DEP	FIA (BN)	CTAF/AFRU	ELEVATIONS IN FEET AMSL BEARINGS ARE MAGNETIC
114.1 133.5 276	133.5	128.1 236.1	121.8 264.6	118.3 257.8	126.8 307.8	120.55	/PAL 118.3	

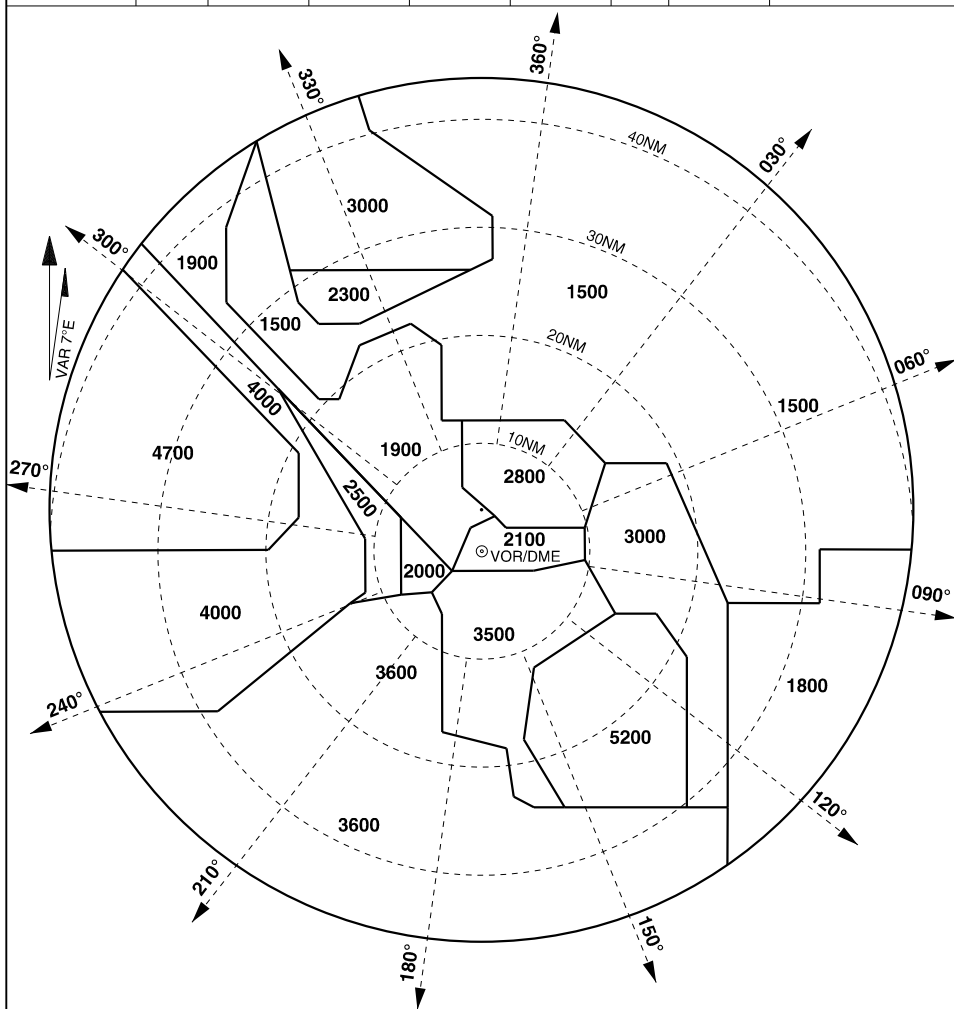

- NOTE:
1. BEARINGS AND DISTANCES FROM VOR/DME.
 2. RTCC CENTRED ON THE RADAR HEAD.
 3. RADAR SITE IS 349° M AT 3.5 NM FROM THE ARP.
 4. THE ARP IS SITUATED AT THE INTERSECTION OF THE RUNWAYS
 5. RADAR SITE IS 007° M/5.5 NM FROM THE TACAN.

ATC USE ONLY

CHANGES: REVISED MINIMA
13 AUG 20

AIS-AF
MILITARY USE ONLY

TOWNSVILLE INTL (YBTL)
RTCC